



# IFD INLINE FOAM DAMPER

AIR MANAGEMENT SYSTEMS

## PRODUCT PROPERTIES

**IFD (DINØRP)** is an inline damper for circular ducts. It is completely made from soft foam with good damping abilities. The damper has a number of oval openings equipped with releasable plugs. The pressure drop across the damper is adjusted by varying the number of open holes. Due to the special material and the design of the holes, sound generation will be low even at large pressure drops. The damper is equipped with a measurement outlet to make adjustment faster. The stable foam has an open cell structure and high density, which makes for an extraordinary ability to absorb sound. Because of this, the damper acts as a simple silencer. By placing several dampers after one another in a duct, the silencing is increased further. Sound problems, such as overhearing between rooms, can often be solved.


**FIRECLASS** Flame retardant (EN ISO 11925-2:2002).

**MATERIAL** The Foam damper is mainly made from a flexible polyurethane foam on one side Protective PU-foil.

## DIMENSIONS

Size (mm)	øD1	øD2	S
080	80	82	50
100	100	102	50
125	125	127	50
160	160	162	50
200	200	202	50
250	250	252	75
315	315	318	75

øD1 = diameter of the duct

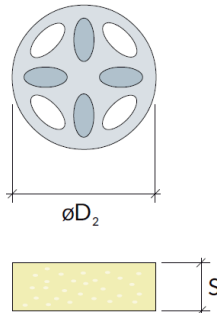

## INSTALLATION

The damper is incredibly easy to install which makes it an ideal choice for use with existing installations. Simply insert the damper in the duct opening from the room side. No tools are needed. The formable damper will seal tightly against the duct wall. The damper can be easily cleaned with a vacuum during duct cleaning.

**A (mm) B (mm)**

Supply air > 050-350 050-250

Exhaust air > 0-050 050-250

**ØD1** = Diameter of the duct


**A** = Minimum distance between duct opening and the first damper

**B** = Minimum distance between dampers

## ACOUSTIC DATA

Sound power level  $L_w = L_{wa} + K_w / \text{Table } K_w$

Size (mm)	63Hz	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz	8000Hz
080	6	4	3	0	-9	-10	-17	-24
100	6	4	3	0	-9	-10	-17	-24
125	4	2	1	0	-8	-10	-18	-24
160	5	4	3	0	-9	-10	-18	-22
200	4	2	5	-4	-10	-15	-20	-25
250	5	4	3	0	-9	-10	-18	-22
315	4	2	5	-4	-10	-15	-20	-25

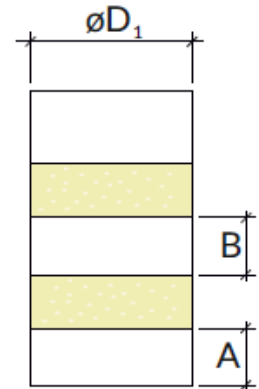

## SOUND ATTENUATION

The sound attenuation without end reflection. Number of open holes

Size (mm)	Open Holes	63Hz	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz	8000Hz
080	2	2.5	2	3	4.5	6	9	10	16
	3	3	3.5	2.5	5.5	8.5	8.5	15	19
100	5	1.5	2.5	1.5	3.5	6	6.5	12	17
	3	5	6	5	5	12	13	19	21
125	8	1	1.5	1.5	2.5	6	6	11	18
	1	6.5	7	4	9.5	13	16	18	22
160	5	3	3.5	2.5	5.5	8.5	8.5	15	20
	2	4	6.5	2.5	5.5	13	14	18	16
200	8	2	2	1	1.5	7	7	13	14
	3	5	4	3	7	13	19	18	17
250	10	2	3	1.5	2.5	7.5	11	14	13
	4	5	5	3	6	12	15	16	18
315	14	2	2	1	1.5	7	8	10	13

## LIABILITY:

The information contained in this brochure was current on the publication date. DEC INTERNATIONAL reserves the right to make changes in details at any time without prior notice. In order to avoid misunderstandings, any interested party is advised to contact DEC INTERNATIONAL checking for any changes in materials and/or information after this brochure was published.

## PLEASE NOTICE:

The consultant is responsible for the actual installation and mounting of the product. The mentioned values with respect to temperatures are not appropriate to be used to determine the physical properties. These properties are also dependent on humidity and the temperature of the air inside and outside of the H.V.A.C. system.

## TRADEMARKS:

DEC International and the DEC logo are trademarks, or registered trademarks of Dutch Environment Corporation BV in the Netherlands and/or other countries.












# IFD INLINE FOAM DAMPER

AIR MANAGEMENT SYSTEMS

**AIR FLOW RATE & PRESSURE LOSS**

L = Sound power level in the duct dB(A).  $\Delta P_t$ (Pa) = Total pressure loss

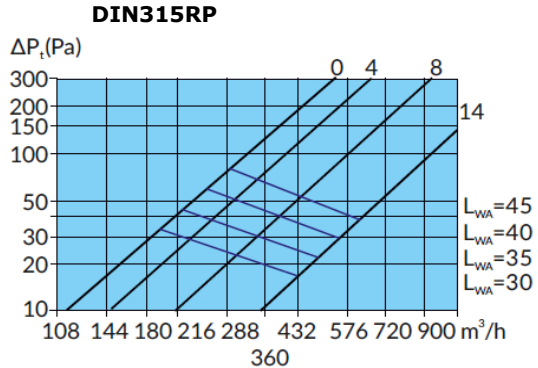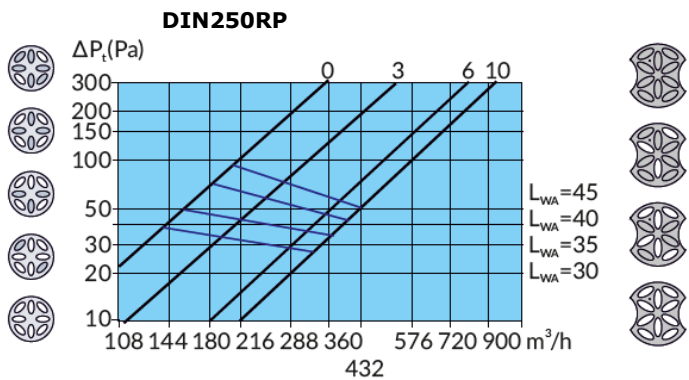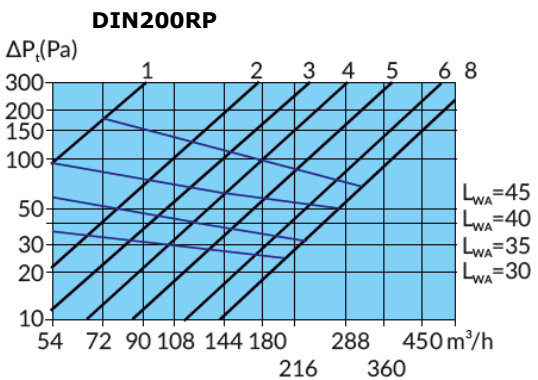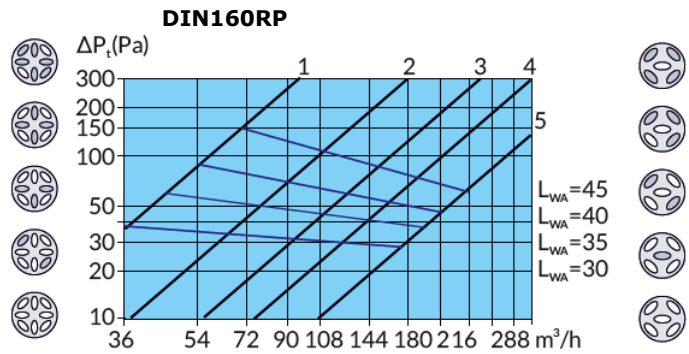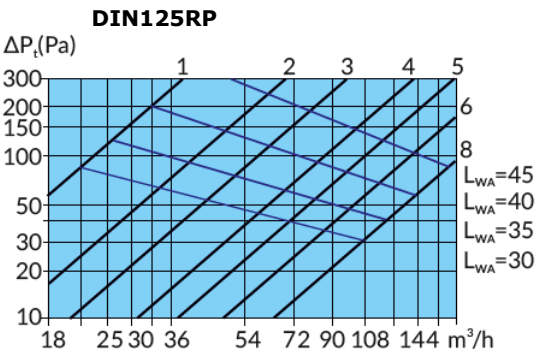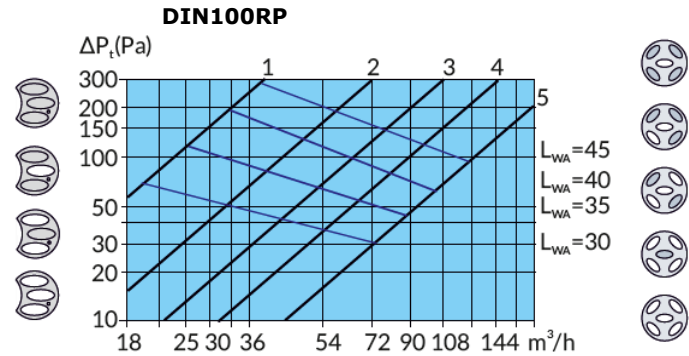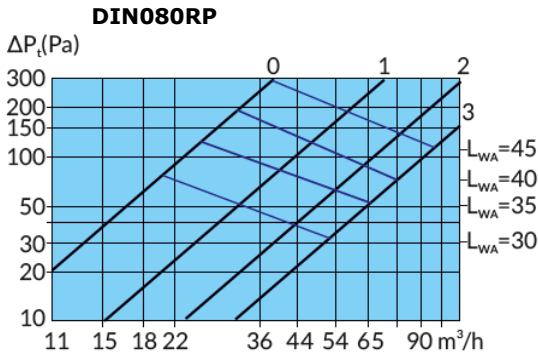

The symbol shows the number of open holes. The curved in the diagram are keyed with a number. The number shows how many holes are open

